

- VERY COMPACT DESIGN
- R22/R410A REFRIGERANT
- "A" TYPE EVAPORATOR
- PRE-PAINTED STEEL CABINET
- FACTORY INSTALLED 24V CONTROLS
- FITS VERTICAL & HORIZONTAL APPLICATION
- PROGRAMMABLE THERMOSTAT INCLUDED



COMPACT AIR HANDLER



Washable Filter



Auto Restart Function



Auto Defrosting




Anti-Corrosion




Quiet Design



Wired Controller

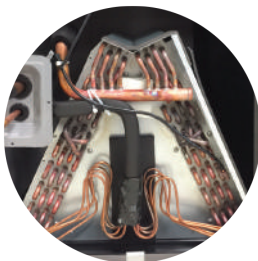

"A" TYPE EVAPORATOR

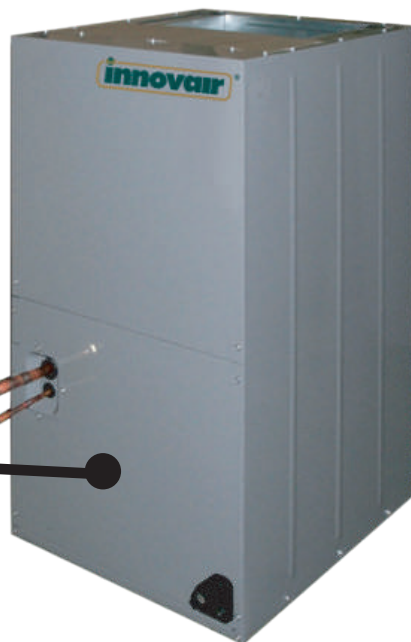

WIRED THERMOSTAT INCLUDED



24V LOW VOLTAGE SAFETY CONTROL



24K TO 60K BTU



AUTO RESTART

Download This Brochure at www.innovair.com

SYSTEM

MODEL		DXC24C2AN1	DXC36C2AN1	DXC48C2AN1	DXC60C2AN1
CAPACITY	Nominal (BTU/H)	24,000	36,000	48,000	60,000
AIRFLOW	CFM	800	1,200	1,600	2,000
POWER SUPPLY	Volt-Phase-Hertz	208/230V-1Ph-60Hz			
MOTOR	HP	1/3	1/2	3/4	3/4+
	Capacitor	6X370-440	15X370-440	12X370-440	12X370-440
	RPM	1075	1075	1075	1075
	Speed	2	2	2	2
SOUND LEVEL	dB(A)	48	51	50	51
FAN	Material	STEEL			
	No. of Fans	1	1	1	1
REFRIGERANT	Type	R22 / R410a			
REFRIGERANT CONNECTIONS	Type Flare / Sweat	SWEAT			
	Fixed or Removable	REMOVABLE			
	Liquid (in)	3/8"	3/8"	3/8"	3/8"
	Suction (in)	5/8"	3/4"	3/4"	3/4"
DRAIN CONN	Diameter	3/4"	3/4"	3/4"	3/4"
FILTERS	Type	WASHABLE			
	Height (in)	30 1/2"	30 1/2"	38 1/4"	38 1/4"
UNIT DIMENSIONS	Width (in)	18 1/8"	18 1/8"	19 3/4"	19 3/4"
	Depth (in)	20 1/2"	20 1/2"	21 3/4"	21 3/4"
	Height (in)	32 7/8"	32 7/8"	40 3/4"	40 3/4"
PACKAGING DIMENSIONS	Width (in)	20 1/2"	20 1/2"	22"	22"
	Depth (in)	22 1/2"	22 1/2"	23 1/2"	23 1/2"
	Height (in)	32 7/8"	32 7/8"	40 3/4"	40 3/4"
GROSS WEIGHT	Lbs.	84	93	108	122

* Specifications are subject to changes without notice.

** Model numbers, pictures, and specifications of all products are subject to change without further notice.

PERFECT FOR



HOUSE



OFFICE



RESTAURANT

Distributed by:



© 2015 Innovair Corporation. All Rights Reserved.

Connect with us



www.innovair.com

INNEINVUIE150201